




Clip Window



INSTALLATION INSTRUCTION OF DIVIDED OPENING FRAMES IN INTERIOR PARTITION WALLS

Window installation

1. The divided frame window is delivered ready to fit, assembled and equipped with two glass panes (one in each section). Each section (A & B) is detached from its counterpart by press of the holding lamella that hold them

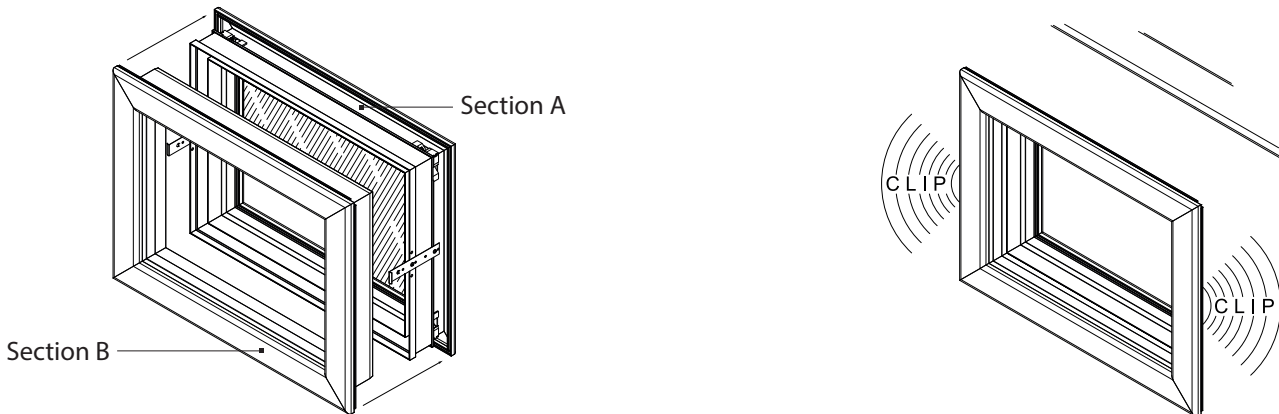

2. In the two vertical (side) profiles of one section (A), in the middle of their height, has been placed and screwed with two sheet metal screws on the outer side from an anchor plate. This holding lamella has three alternative mounting positions for masonry thicknesses of 75mm, 93mm and 100mm.

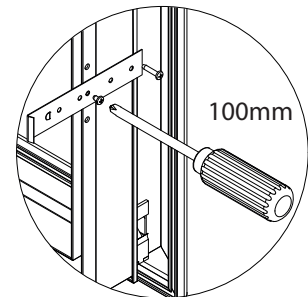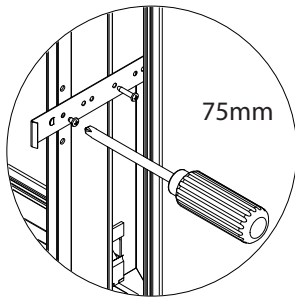

Window removal

To remove the window, the holding lamellas are pressed with a common (steel) spatula on both sides (right and left) the anchor plates and by pulling the spatula towards the operator, section B is detached and removed.

With the proper press of the spatula inwards, while the vertical profile of the half (outer) frame (B) is pushed towards the wall, the shaped elongated projection is released of its vertical profile from the bent edge of the anchor plate.

